E3 – Connecting control: SCUBA-drive® 140, 250 & 500Nm

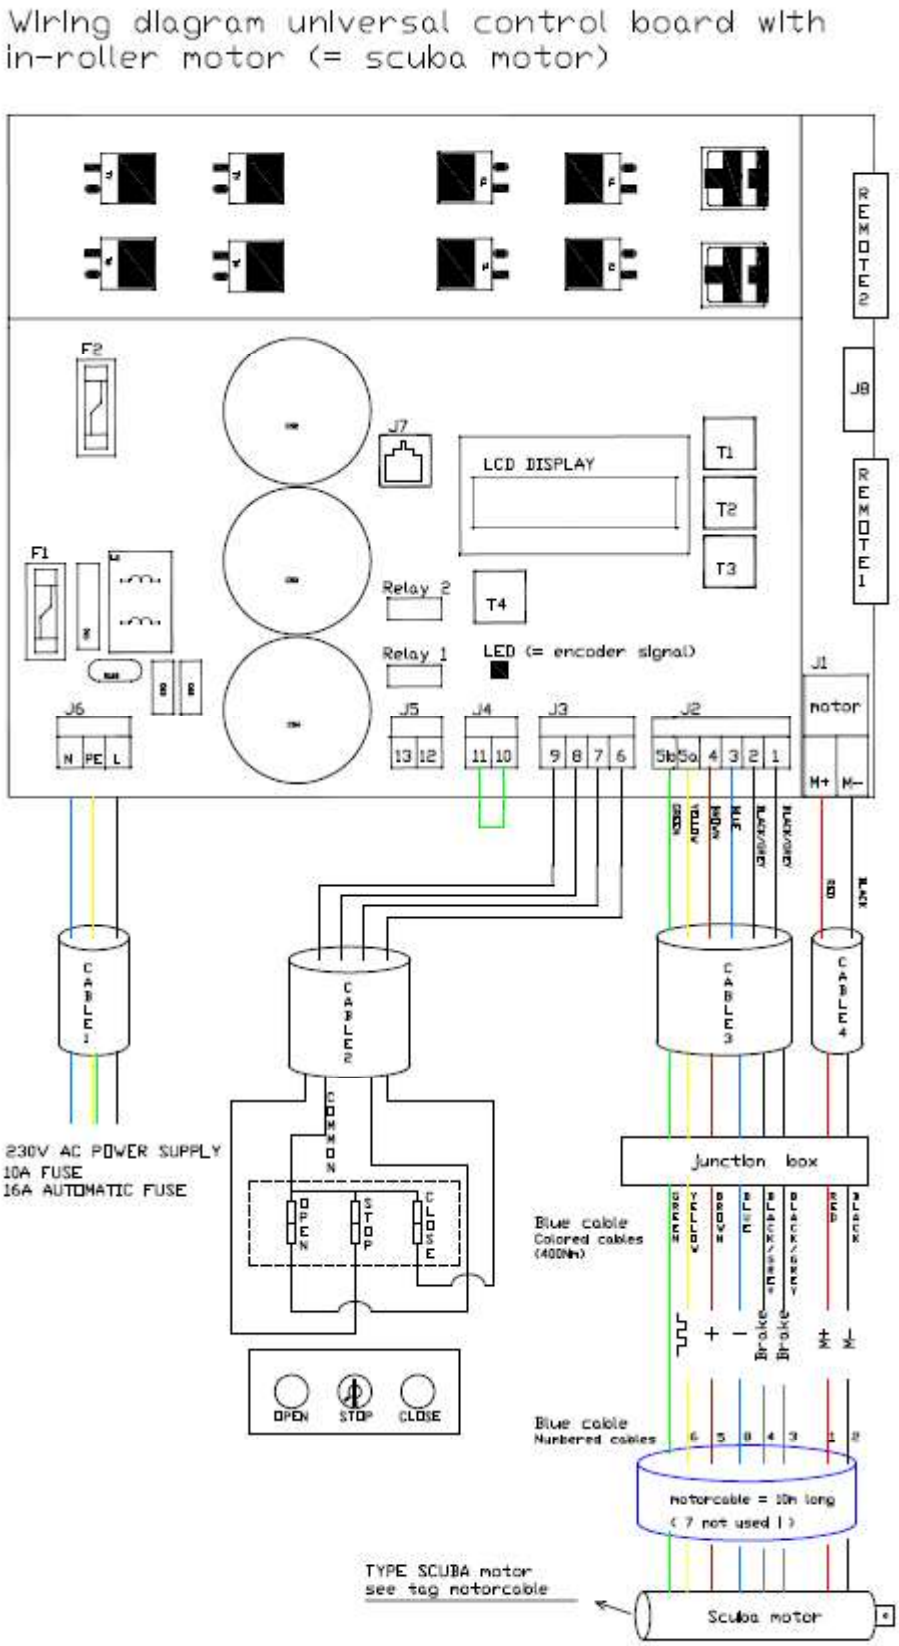

Black = Grey

Code		Technical description	
CABLE1		Min. 3 x 1,5 mm²	**Flexible wire!**
CABLE2		Min. 4 x 0,75 mm²	**Flexible wire!**
CABLE3		Min. 5 x 1,5 mm² covered	**Flexible wire!**
CABLE4		Min. 2 x 4 mm²	**Flexible wire!**
Remote 1		Connector receiver print remote control	
Remote 2		**NOT USED**	
Relay1		connector relay print 1 (relay 1-4)	
Relay2		connector relay print 2 (relay 5-8)	
J1	M1	Motor + or -	
	M2	Motor + or -	
J2	1	Brake	
	2	Brake	
	3	Sensor -	
	4	Sensor +	
	5a	Sensor signal A	
	5b	Sensor Signal B	
J3	6	Push button CLOSE	**Attention : no external voltage on 6-7-8-9 !**
	7	Push button OPEN	
	8	Common	
	9	Key switch STOP	
J4	10	Bridge or water level contact	
	11	Bridge or water level contact	
J5	12	Programmable input	
	13	Programmable input	
J6	L	Power supply 230V	
	PE	Earthing	
	N	Power supply 230V	
J7		Ethernet connection	
J8		Additional connector remote control	
F1		Glass fuse 2A	
F2		Fuse 20A	
T1		Scroll up / OPEN	
T2		Enter (confirmation of the choice)	
T3		Scroll down / CLOSE	
T4		Menu / return	

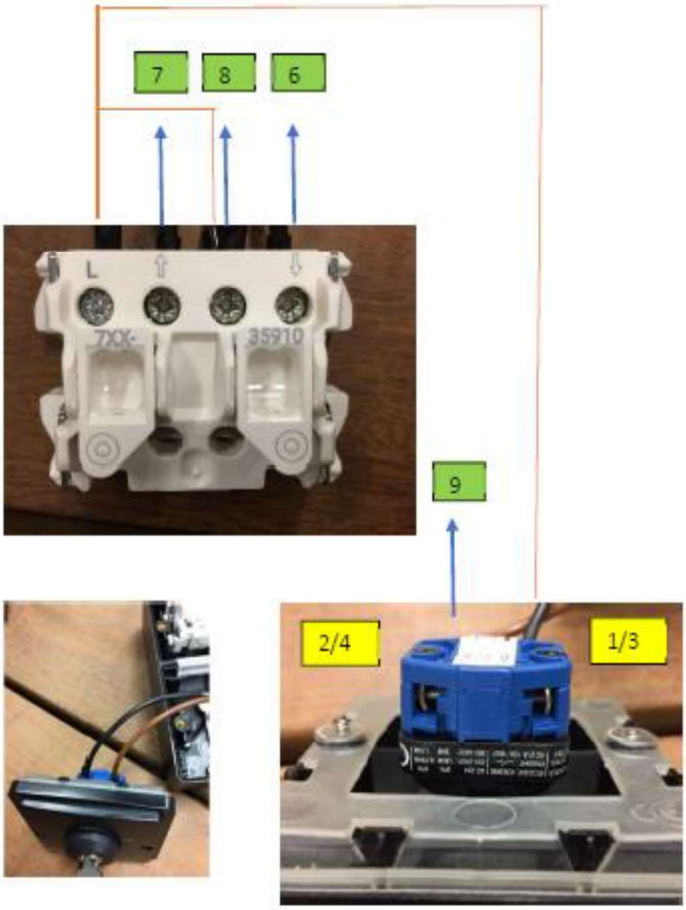
7
8
6
L
9
2/4
1/3

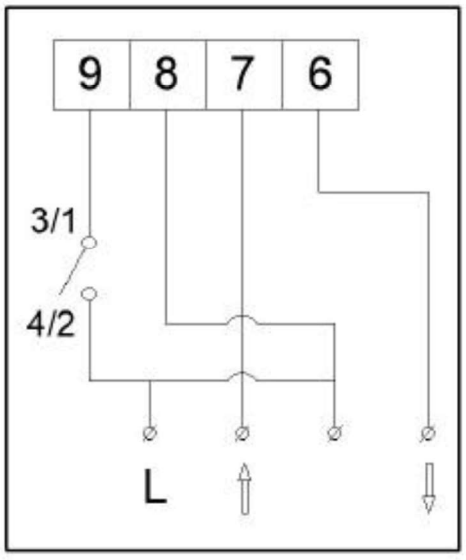
9
8
7
6
3/1
4/2
L